


Product data sheet

TS 3000 B *

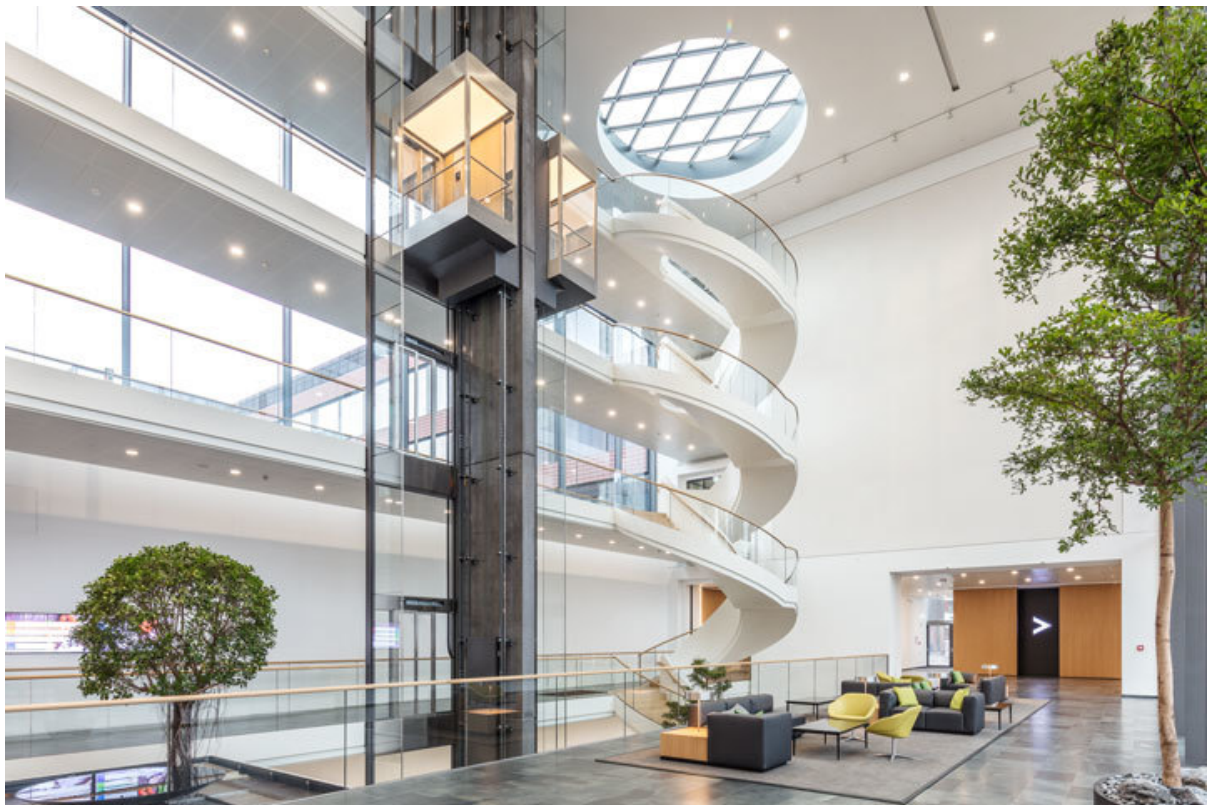

Guide rail door closer for 1-leaf doors of up to 1100 mm leaf width

AREAS OF APPLICATION

- Fire and smoke protection doors
- Right and left single-action doors
- Single-action doors up to 1100 mm leaf width
- Door leaf installation on the hinge side or opposite hinge side
- Transom installation on the opposite hinge side



PRODUCT FEATURES

- Closing force of EN2-4 with variable adjustment
- Hydraulic latching action which accelerates the door shortly before it is closed
- Integrated back check, slows down doors that are thrown open forcefully
- Closing speed can be individually adjusted
- All functions can be adjusted from the front, except for the closing force which is on the side

TECHNICAL DATA

Productname	TS 3000 B *
Closing force in accordance with EN 1154	EN 2 - 4
Leaf width (max.)	110 cm
Opening angle (max.)	130 °
Identical design for DIN left and DIN right	Yes
Standard conformity	EN 1154:1996/A1:2002/AC:2006
Suitability for fire protection doors	Yes
Length	260 mm
Width	49 mm
Height	40 mm
Closing force adjustable	Yes, stepless
Adjustable closing speed	Yes
Latching action adjustable	Yes, via valve
Position of closing force adjustment	At the side
Safety valve against overload	Yes
Thermo-control valves	Yes
Smoke switch integrated	No

VARIANTS / ORDER INFO

Designation	Description	Ident-No.	Colour	Closing force in accordance with EN 1154	Dimensions
GEZE TS 3000 B *	Set consisting of GEZE TS 3000 B incl. guide rails, without cover cap	117816		EN 2 - 4	260 x 49 x 40 mm
GEZE TS 3000 B *	Set comprising GEZE TS 3000 B including guide rail, cover cap and fixing material	120649	Stainless steel optic	EN 2 - 4	260 x 49 x 40 mm
GEZE TS 3000 B *	Set comprising GEZE TS 3000 B including guide rail, cover cap and fixing material	120650	Satin stainless steel	EN 2 - 4	260 x 49 x 40 mm
GEZE TS 3000 B *	Set comprising GEZE TS 3000 B including guide rail, cover cap and fixing material	120691	Polished stainless steel	EN 2 - 4	260 x 49 x 40 mm

TS 3000 B *



* The products designated above may vary in form, type, characteristics, function, or availability depending on the country. Please get in touch with your GEZE contact person if you have any questions.